



HOTHMI®

深圳市鑫洪泰电子科技有限公司

Shenzhen Hot Display Technology Co.,Ltd

# Product Specification

## 产品规格书

产品生产商：深圳市鑫洪泰电子科技有限公司

产品名称：2.99寸268\*800点阵彩屏模组

规格型号：TFT-H030W13

部门确认：

| 研发 | 工程 | 品管 | 审核 |
|----|----|----|----|
|    |    |    |    |

印章：

日期：

客户回签：

| 采购 | 工程 | 品管 | 确认 |
|----|----|----|----|
|    |    |    |    |

印 章:

日 期:

## Table of Contents

|                                         |           |
|-----------------------------------------|-----------|
| <b>REVISION HISTORY</b>                 | <b>3</b>  |
| <b>1. GENERAL DESCRIPTION</b>           | <b>4</b>  |
| 1.1 DESCRIPTION                         | 4         |
| 1.2 GENERAL INFORMATION                 | 4         |
| <b>2. ABSOLUTE MAXIMUM RATING</b>       | <b>5</b>  |
| <b>3. ELECTRICAL CHARACTERISTICS</b>    | <b>6</b>  |
| 3.1 LCM DC CHARACTERISTICS              | 6         |
| 3.2 BACK-LIGHT UNIT CHARACTERISTICS     | 6         |
| <b>4. OPTICAL CHARACTERISTICS</b>       | <b>7</b>  |
| <b>5. MODULE OUTLINE DIMENSION</b>      | <b>11</b> |
| <b>6. MODULE INTERFACE DESCRIPTION</b>  | <b>12</b> |
| <b>7. REFERENCE APPLICATION CIRCUIT</b> | <b>13</b> |
| <b>8. TIMINGS FOR RGB Interface</b>     | <b>14</b> |
| <b>9. RELIABILITY TEST CONDITIONS</b>   | <b>16</b> |
| <b>10. PACKING</b>                      | <b>17</b> |
| <b>11. INSPECTION CRITERION</b>         | <b>17</b> |
| <b>12. GENERAL PRECAUTIONS</b>          | <b>21</b> |

[illegible]

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |

## 1. GENERAL DESCRIPTION

### 1.1 DESCRIPTION

TFT-H030W13 is a transmissive type color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module (TFT-LCD panel, driver IC and FPC), a back-light unit and. The resolution of 2.99" contains 268 RGB X800 pixels and can display up to 16.7m colors.

### 1.2 GENERAL INFORMATION

| Items               | Specification             | Unit   | Note |
|---------------------|---------------------------|--------|------|
| Drive element       | a-Si TFT                  | -      | -    |
| LCM outline size    | 26.96 (H) x 80.08 (V)     | mm     |      |
| Active area         | 24.12 (H) x 72(V)         | mm     | -    |
| Number of pixels    | 268(H)X800(V)             | pixels | -    |
| Pixel arrangement   | RGB stripe                | -      | -    |
| Pixel Pitch         | 0.09x0.09                 | um     | -    |
| Display color       | 16.7m color               | color  | -    |
| Viewing direction   | ALL                       | -      | -    |
| Controller / Driver | ST7701S                   | -      | -    |
| Data interface      | SPI3W+RGB18bit            | -      |      |
| Backlight           | 6 White LEDs In Parallels | -      |      |
| Weight              | TBD                       | g      |      |

## 2. ABSOLUTE MAXIMUM RATING

(Ta=25±2°C, Vss=GND=0V)

| Characteristics           | Symbol           | Min. | Typ | Max. | Unit | Notes      |
|---------------------------|------------------|------|-----|------|------|------------|
| Supply Voltage            | IOVCC            | 1.65 | 1.8 | 3.3  | V    |            |
|                           | VCI              | 2.5  | 2.8 | 3.6  | V    |            |
| TFT Gate On voltage       | VGH              | 11.5 |     | 17   | V    |            |
| TFT Gate Off voltage      | VGL              | -7.6 |     | -12  | V    |            |
| Backlight Forward Current | I <sub>F</sub>   | -    |     | 20   | mA   |            |
| Operating Temperature     | T <sub>OPR</sub> | -20  |     | +70  | °C   | (1), (3)   |
| Storage Temperature       | T <sub>STG</sub> | -30  |     | +80  | °C   | (2), (3)   |
| Humidity                  | RH               | -    |     | 90   | %    | Max. 60 °C |

Notes:

- (1) In case of below 0°C, the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of the LC characteristics.
- (2) If product is exposed to high temperatures for extended time, there is a possibility of the polarizer film damage which could degrade the optical characteristics.
- (3) Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is loaded.  
Functional operation should be restricted to the conditions described under normal operating conditions.

### 3. ELECTRICAL CHARACTERISTICS

#### 3.1 LCM DC CHARACTERISTICS

(Ta=25±2°C)

| Characteristics          | Symbol                | Min.     | Typ. | Max.     | Unit | Note                  |
|--------------------------|-----------------------|----------|------|----------|------|-----------------------|
| Power Supply Voltage 1   | IOVCC                 | 1.65     | 1.8  | 3.3      | V    |                       |
| Power Supply Voltage 2   | VCI                   | 2.5      | 2.8  | 3.6      | V    |                       |
| Power Supply Voltage 3   | -                     | -        | -    | -        | V    |                       |
| Power Supply for MTP     | VPP                   | -        | -    | -        | V    |                       |
| Current Consumption      | I <sub>DD</sub>       | -        | TBD  | -        | mA   | Normal mode           |
|                          | I <sub>DD-SLEEP</sub> |          | TBD  |          | uA   | Sleep mode            |
| Input voltage "L" Level  | V <sub>IL</sub>       | GND      | -    | 0.3IOVCC | V    | IOVCC=1.65~3.3        |
| Input voltage "H" Level  | V <sub>IH</sub>       | 0.7IOVCC | -    | IOVCC    | V    |                       |
| Output voltage "L" Level | V <sub>OL</sub>       | GND      | -    | 0.2IOVCC | V    | I <sub>OL</sub> =1mA  |
| Output voltage "H" Level | V <sub>OH</sub>       | 0.8IOVCC | -    | IOVCC    | V    | I <sub>OH</sub> =-1mA |

#### 3.2 BACK-LIGHT UNIT CHARACTERISTICS

The back-light system is an edge-lighting type with 4 white LEDs. The characteristics of the back-light are shown in the following tables.


(Ta=25±2°C)

| Characteristics | Symbol         | Condition            | Min.   | Type   | Max. | Unit              | Notes  |
|-----------------|----------------|----------------------|--------|--------|------|-------------------|--------|
| Forward Voltage | V <sub>f</sub> | I <sub>L</sub> =20mA | 18     |        | 19.2 | V                 | -      |
| Forward current | I <sub>L</sub> |                      | -      | 20     | -    | mA                | -      |
| Luminance       | L <sub>v</sub> | I <sub>L</sub> =20mA | --     | 800    | --   | cd/m <sup>2</sup> | -      |
| LED life time   | -              | I <sub>L</sub> =20mA | 20,000 | 25,000 | --   | Hr                | Note 1 |

Note:

- (1) The "LED life time" is defined as the module brightness decrease to 50% of original brightness at I<sub>L</sub>=20mA. The LED life time could be decreased if operating I<sub>L</sub> is larger than 20mA.

Bcklight circuit diagram shown in below:



## 4. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room.

Measuring equipment: BM-5AS, BM-7, EZ-Contrast.

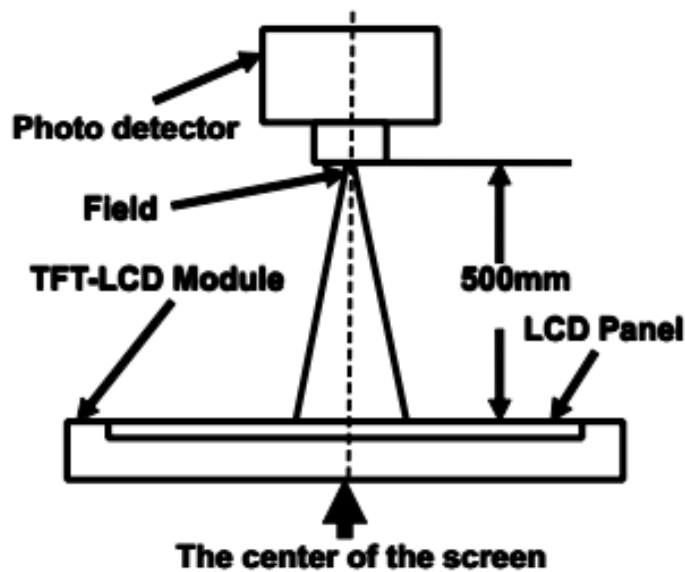
(Ta=25±2°C)

| Parameter                            |       | Symbol         | Condition                                                     | Min.  | Typ.  | Max.  | Unit  | Note                   |
|--------------------------------------|-------|----------------|---------------------------------------------------------------|-------|-------|-------|-------|------------------------|
| Contrast Ratio<br>(Center point)     |       | C/R            | -                                                             | 1000  | 1200  | -     | -     | BM-7<br>Note(2)        |
| Luminance of white<br>(Center point) |       | L <sub>w</sub> | B/L on                                                        | 15%   | TBD   | 15%   | cd/m² | CA-210                 |
| Luminance uniformity                 |       | U <sub>w</sub> | θ = 0.<br>Normal<br>viewing<br>angle<br>B/L On<br><br>Note(1) | 80    | -     | -     | %     | BM-7<br>Note(3)        |
| Response Time                        |       | Tr + Tf        |                                                               | -     | 30    | 40    | ms    | BM-5AS<br>Note(4)      |
| Color<br>Chromaticity<br>(CIE 1931)  | White | W <sub>x</sub> |                                                               | 0.290 | 0.292 | 0.294 | -     | CA-210<br>Note(5)      |
|                                      |       | W <sub>y</sub> |                                                               | 0.332 | 0.334 | 0.336 |       |                        |
|                                      | Red   | R <sub>x</sub> |                                                               | 0.646 | 0.648 | 0.650 |       |                        |
|                                      |       | R <sub>y</sub> |                                                               | 0.326 | 0.328 | 0.330 |       |                        |
|                                      | Green | G <sub>x</sub> |                                                               | 0.285 | 0.287 | 0.289 |       |                        |
|                                      |       | G <sub>y</sub> |                                                               | 0.571 | 0.573 | 0.575 |       |                        |
|                                      | Blue  | B <sub>x</sub> |                                                               | 0.138 | 0.14  | 0.142 |       |                        |
|                                      |       | B <sub>y</sub> |                                                               | 0.138 | 0.14  | 0.142 |       |                        |
| Viewing<br>Angle                     | Hor.  | θ <sub>T</sub> | C/R≥10                                                        | -     | 80    | -     | Deg   | EZ Contrast<br>Note(6) |
|                                      |       | θ <sub>B</sub> |                                                               | -     | 80    | -     |       |                        |
|                                      | Ver.  | θ <sub>L</sub> |                                                               | -     | 80    | -     |       |                        |
|                                      |       | θ <sub>R</sub> |                                                               | -     | 80    | -     |       |                        |
| Optima View Direction                |       |                | ALL                                                           |       |       |       |       | Note(7)                |

\* This condition will be changed by the evaluation circumstance. If product is exposed to high temperatures for extended time, there is a possibility of the polarizer film damage which could degrade the optical characteristics.

Notes:

- (1) Test Equipment Setup: After stabilizing and leaving the panel alone at a given temperature for 30min, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room 30min after lighting the back-light. This should be measured in the center of screen.

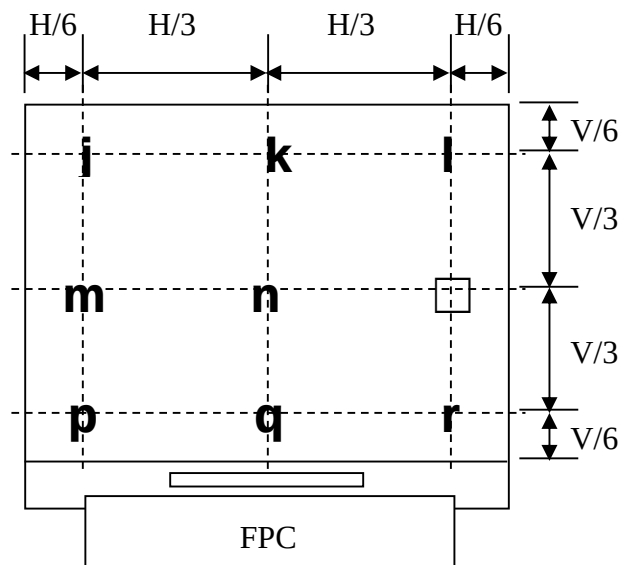


- (2) Definition of Contrast Ratio (CR):

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance measured when LCD on the "white" state}}{\text{Luminance measured when LCD on the "black" state}}$$

- (3) Definition of Luminance Uniformity: Active area is divided into 9 measuring areas (Shown in below), every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity} = \frac{\text{Min Luminance of white among 9-points}}{\text{Max Luminance of white among 9-points}} \times 100\%$$

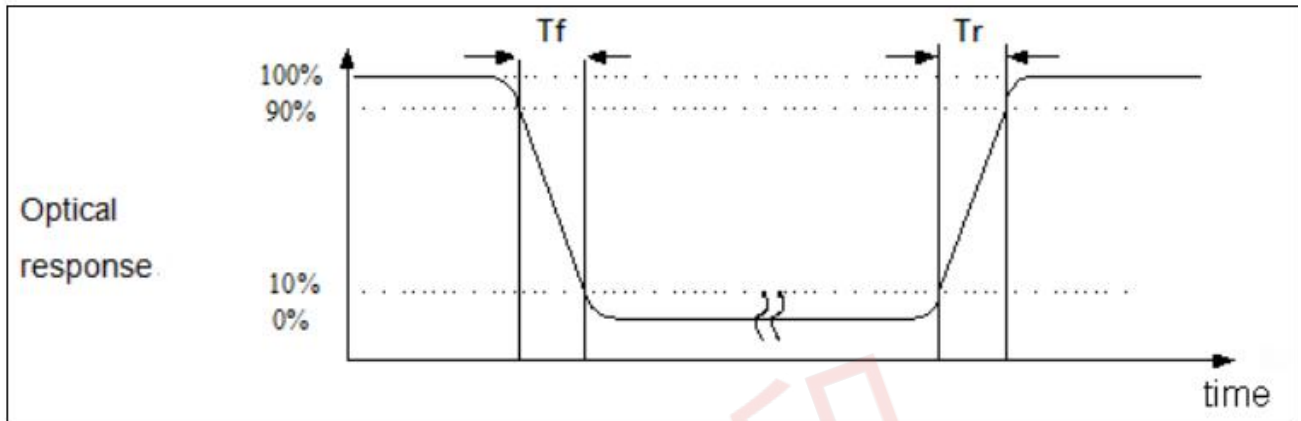


The spot locations for luminance measurement

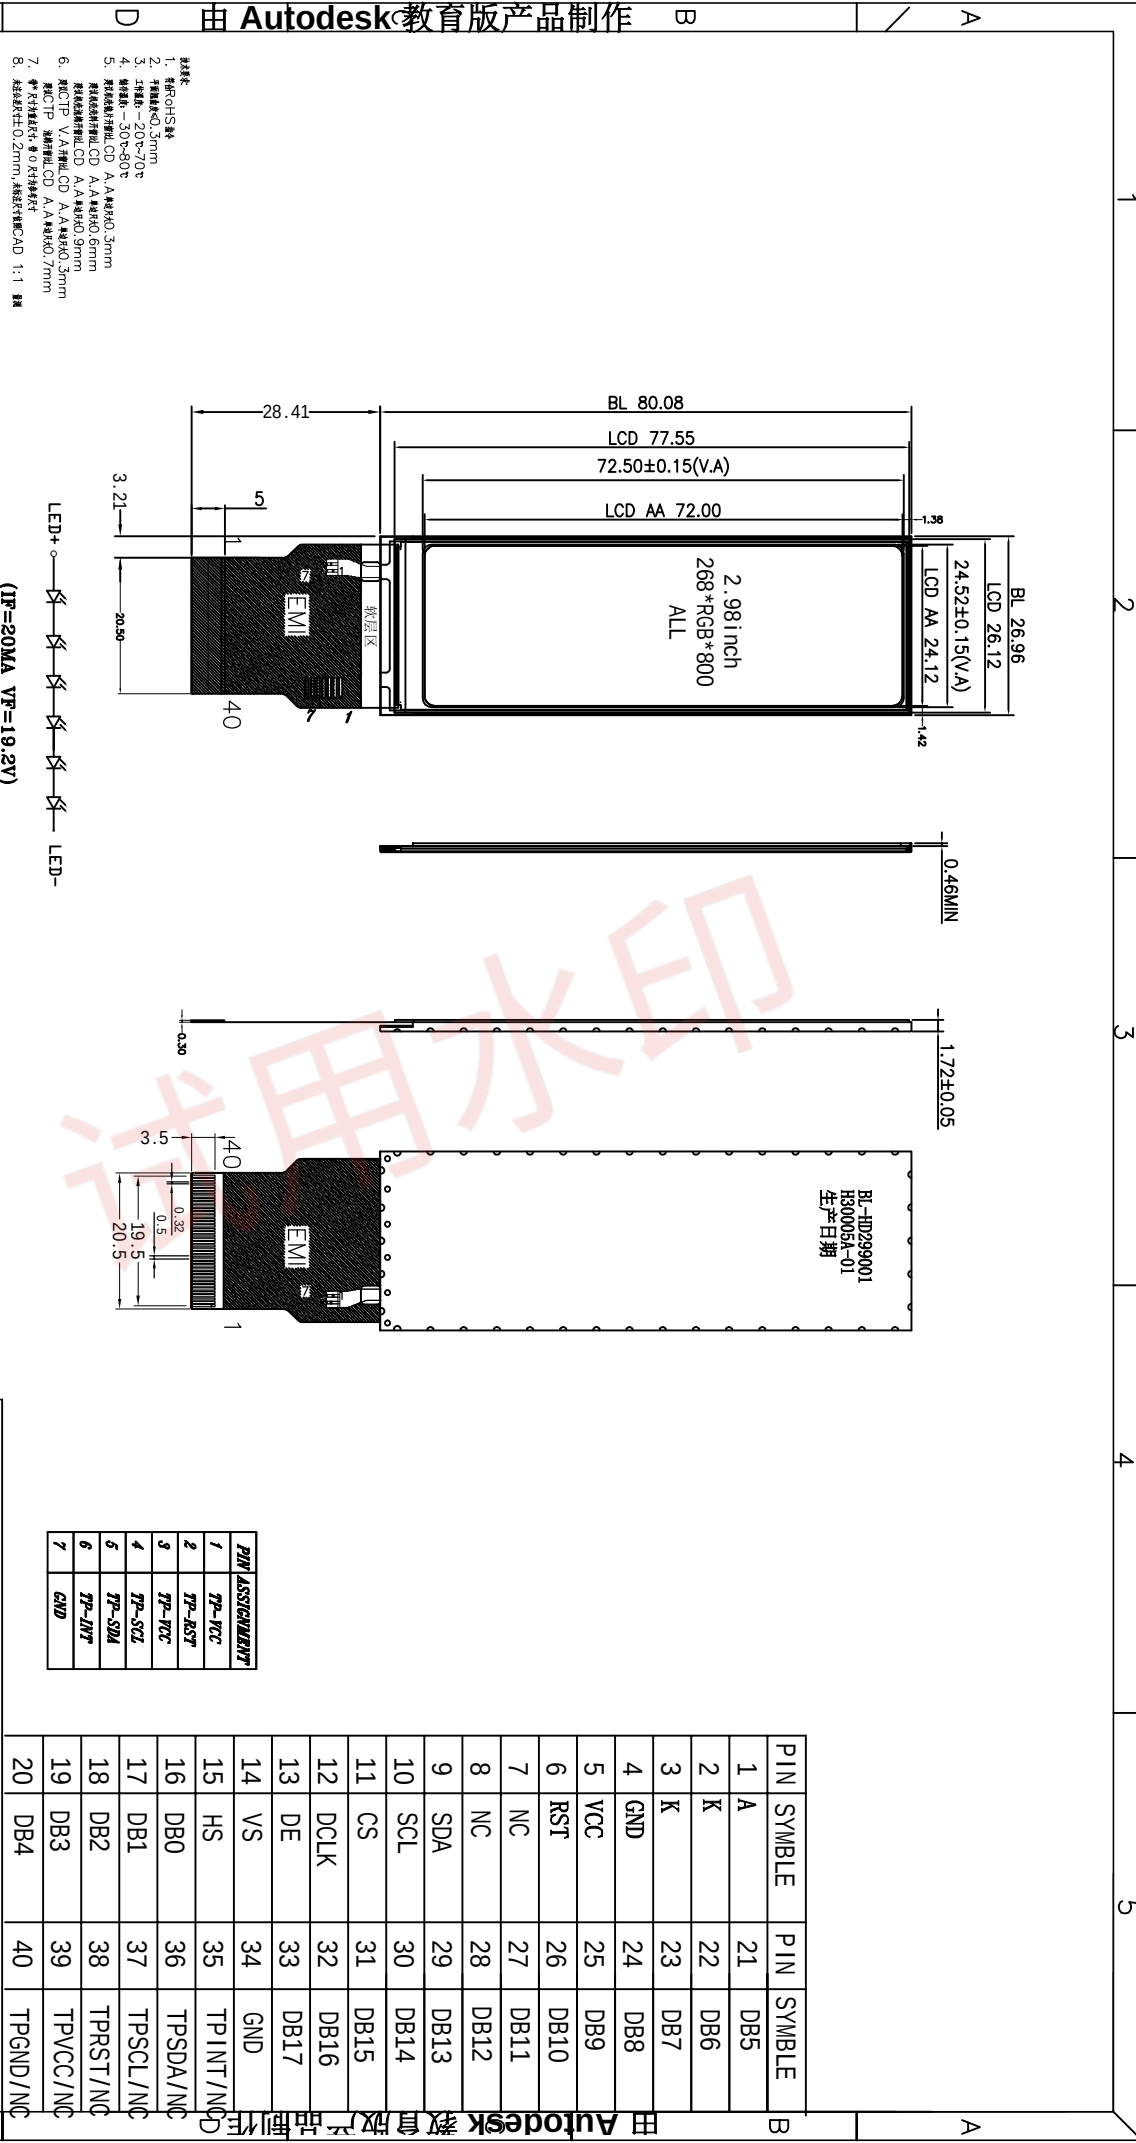
(4) Definition of Response time:

The output signals of photo detector are measured when the input signals are Changed from “black” to “white” (rising time) and from time “white” to “black” (falling time), Respectively.

The response time is defined as the time interval between the 10% and 90% of Amplitudes. Refer to figure as below.



(5) Definition of viewing angle , 0 . Refer to figure as below



LED+ - - - - - LED- (IF=20MA VP=1.9.2V)

- 尺寸表
1. 板厚: 1.6mm
  2. 孔径: 0.3mm
  3. 孔径: 0.3mm
  4. 孔径: 0.3mm
  5. 孔径: 0.3mm
  6. 孔径: 0.3mm
  7. 孔径: 0.3mm
  8. 孔径: 0.3mm

1. 板厚: 1.6mm

2. 孔径: 0.3mm

3. 孔径: 0.3mm

4. 孔径: 0.3mm

5. 孔径: 0.3mm

6. 孔径: 0.3mm

7. 孔径: 0.3mm

8. 孔径: 0.3mm

9. 孔径: 0.3mm

10. 孔径: 0.3mm

11. 孔径: 0.3mm

12. 孔径: 0.3mm

13. 孔径: 0.3mm

14. 孔径: 0.3mm

15. 孔径: 0.3mm

16. 孔径: 0.3mm

17. 孔径: 0.3mm

18. 孔径: 0.3mm

19. 孔径: 0.3mm

20. 孔径: 0.3mm

21. 孔径: 0.3mm

22. 孔径: 0.3mm

23. 孔径: 0.3mm

24. 孔径: 0.3mm

25. 孔径: 0.3mm

26. 孔径: 0.3mm

27. 孔径: 0.3mm

28. 孔径: 0.3mm

29. 孔径: 0.3mm

30. 孔径: 0.3mm

31. 孔径: 0.3mm

32. 孔径: 0.3mm

33. 孔径: 0.3mm

34. 孔径: 0.3mm

35. 孔径: 0.3mm

36. 孔径: 0.3mm

37. 孔径: 0.3mm

38. 孔径: 0.3mm

39. 孔径: 0.3mm

40. 孔径: 0.3mm

41. 孔径: 0.3mm

42. 孔径: 0.3mm

43. 孔径: 0.3mm

44. 孔径: 0.3mm

45. 孔径: 0.3mm

46. 孔径: 0.3mm

47. 孔径: 0.3mm

48. 孔径: 0.3mm

49. 孔径: 0.3mm

50. 孔径: 0.3mm

51. 孔径: 0.3mm

52. 孔径: 0.3mm

53. 孔径: 0.3mm

54. 孔径: 0.3mm

55. 孔径: 0.3mm

56. 孔径: 0.3mm

57. 孔径: 0.3mm

58. 孔径: 0.3mm

59. 孔径: 0.3mm

60. 孔径: 0.3mm

61. 孔径: 0.3mm

62. 孔径: 0.3mm

63. 孔径: 0.3mm

64. 孔径: 0.3mm

65. 孔径: 0.3mm

66. 孔径: 0.3mm

67. 孔径: 0.3mm

68. 孔径: 0.3mm

69. 孔径: 0.3mm

70. 孔径: 0.3mm

71. 孔径: 0.3mm

72. 孔径: 0.3mm

73. 孔径: 0.3mm

74. 孔径: 0.3mm

75. 孔径: 0.3mm

76. 孔径: 0.3mm

77. 孔径: 0.3mm

78. 孔径: 0.3mm

79. 孔径: 0.3mm

80. 孔径: 0.3mm

81. 孔径: 0.3mm

82. 孔径: 0.3mm

83. 孔径: 0.3mm

84. 孔径: 0.3mm

85. 孔径: 0.3mm

86. 孔径: 0.3mm

87. 孔径: 0.3mm

88. 孔径: 0.3mm

89. 孔径: 0.3mm

90. 孔径: 0.3mm

91. 孔径: 0.3mm

92. 孔径: 0.3mm

93. 孔径: 0.3mm

94. 孔径: 0.3mm

95. 孔径: 0.3mm

96. 孔径: 0.3mm

97. 孔径: 0.3mm

98. 孔径: 0.3mm

99. 孔径: 0.3mm

100. 孔径: 0.3mm

101. 孔径: 0.3mm

102. 孔径: 0.3mm

103. 孔径: 0.3mm

104. 孔径: 0.3mm

105. 孔径: 0.3mm

106. 孔径: 0.3mm

107. 孔径: 0.3mm

108. 孔径: 0.3mm

109. 孔径: 0.3mm

110. 孔径: 0.3mm

111. 孔径: 0.3mm

112. 孔径: 0.3mm

113. 孔径: 0.3mm

114. 孔径: 0.3mm

115. 孔径: 0.3mm

116. 孔径: 0.3mm

117. 孔径: 0.3mm

118. 孔径: 0.3mm

119. 孔径: 0.3mm

120. 孔径: 0.3mm

121. 孔径: 0.3mm

122. 孔径: 0.3mm

123. 孔径: 0.3mm

124. 孔径: 0.3mm

125. 孔径: 0.3mm

126. 孔径: 0.3mm

127. 孔径: 0.3mm

128. 孔径: 0.3mm

129. 孔径: 0.3mm

130. 孔径: 0.3mm

131. 孔径: 0.3mm

132. 孔径: 0.3mm

133. 孔径: 0.3mm

134. 孔径: 0.3mm

135. 孔径: 0.3mm

136. 孔径: 0.3mm

137. 孔径: 0.3mm

138. 孔径: 0.3mm

139. 孔径: 0.3mm

140. 孔径: 0.3mm

141. 孔径: 0.3mm

142. 孔径: 0.3mm

143. 孔径: 0.3mm

144. 孔径: 0.3mm

145. 孔径: 0.3mm

146. 孔径: 0.3mm

147. 孔径: 0.3mm

148. 孔径: 0.3mm

149. 孔径: 0.3mm

150. 孔径: 0.3mm

151. 孔径: 0.3mm

152. 孔径: 0.3mm

153. 孔径: 0.3mm

154. 孔径: 0.3mm

155. 孔径: 0.3mm

156. 孔径: 0.3mm

157. 孔径: 0.3mm

158. 孔径: 0.3mm

159. 孔径: 0.3mm

160. 孔径: 0.3mm

161. 孔径: 0.3mm

162. 孔径: 0.3mm

163. 孔径: 0.3mm

164. 孔径: 0.3mm

165. 孔径: 0.3mm

166. 孔径: 0.3mm

167. 孔径: 0.3mm

168. 孔径: 0.3mm

169. 孔径: 0.3mm

170. 孔径: 0.3mm

171. 孔径: 0.3mm

172. 孔径: 0.3mm

173. 孔径: 0.3mm

174. 孔径: 0.3mm

175. 孔径: 0.3mm

176. 孔径: 0.3mm

177. 孔径: 0.3mm

178. 孔径: 0.3mm

179. 孔径: 0.3mm

180. 孔径: 0.3mm

181. 孔径: 0.3mm

182. 孔径: 0.3mm

183. 孔径: 0.3mm

184. 孔径: 0.3mm

185. 孔径: 0.3mm

186. 孔径: 0.3mm

187. 孔径: 0.3mm

188. 孔径: 0.3mm

189. 孔径: 0.3mm

190. 孔径: 0.3mm

191. 孔径: 0.3mm

192. 孔径: 0.3mm

193. 孔径: 0.3mm

194. 孔径: 0.3mm

195. 孔径: 0.3mm

196. 孔径: 0.3mm

197. 孔径: 0.3mm

198. 孔径: 0.3mm

199. 孔径: 0.3mm

200. 孔径: 0.3mm

201. 孔径: 0.3mm

202. 孔径: 0.3mm

203. 孔径: 0.3mm

204. 孔径: 0.3mm

205. 孔径: 0.3mm

206. 孔径: 0.3mm

207. 孔径: 0.3mm

208. 孔径: 0.3mm

209. 孔径: 0.3mm

210. 孔径: 0.3mm

211. 孔径: 0.3mm

212. 孔径: 0.3mm

213. 孔径: 0.3mm

214. 孔径: 0.3mm

215. 孔径: 0.3mm

216. 孔径: 0.3mm

217. 孔径: 0.3mm

218. 孔径: 0.3mm

219. 孔径: 0.3mm

220. 孔径: 0.3mm

221. 孔径: 0.3mm

222. 孔径: 0.3mm

223. 孔径: 0.3mm

224. 孔径: 0.3mm

225. 孔径: 0.3mm

226. 孔径: 0.3mm

227. 孔径: 0.3mm

228. 孔径: 0.3mm

229. 孔径: 0.3mm

230. 孔径: 0.3mm

231. 孔径: 0.3mm

232. 孔径: 0.3mm

233. 孔径: 0.3mm

234. 孔径: 0.3mm

235. 孔径: 0.3mm

236. 孔径: 0.3mm

237. 孔径: 0.3mm

238. 孔径: 0.3mm

239. 孔径: 0.3mm

240. 孔径: 0.3mm

241. 孔径: 0.3mm

242. 孔径: 0.3mm

243. 孔径: 0.3mm

244. 孔径: 0.3mm

245. 孔径: 0.3mm

246. 孔径: 0.3mm

247. 孔径: 0.3mm

248. 孔径: 0.3mm

249. 孔径: 0.3mm

250. 孔径: 0.3mm

251. 孔径: 0.3mm

252. 孔径: 0.3mm

253. 孔径: 0.3mm

254. 孔径: 0.3mm

255. 孔径: 0.3mm

256. 孔径: 0.3mm

## 6. MODULE INTERFACE DESCRIPTION

| Pin No. | Symbol   | Description                                            |
|---------|----------|--------------------------------------------------------|
| 1       | LEDA     | Back-light Anode                                       |
| 2       | LEDK     | Back-light Cathode                                     |
| 3       | LEDK     | Back-light Cathode                                     |
| 4       | GND      | Power Ground                                           |
| 5       | VCC      | Power supply for interface logic circuits(2.8V-3.3V)   |
| 6       | RST      | Reset input pin                                        |
| 7       | NC       | NC                                                     |
| 8       | NC       | NC                                                     |
| 9       | SDA      | Serial data input / output bidirectional pin for SPI . |
| 10      | SCK      | Serial clock input for SPI interface .                 |
| 11      | CS       | A chip select signal                                   |
| 12      | PCLK     | Dot clock signal for RGB interface operation           |
| 13      | DE       | Data enable signal for RGB interface operation         |
| 14      | VS       | Frame synchronizing signal for RGB interface operation |
| 15      | HS       | Line synchronizing signal for RGB interface operation  |
| 16~33   | DB0-DB17 | A 18 - bit parallel data bus for RGB Interface .       |
| 34      | GND      | Power Ground                                           |
| 35      | TP-INT   | TP-INT                                                 |
| 36      | TP-SDA   | TP-SDA                                                 |
| 37      | TP-SCL   | TP-SCL                                                 |
| 38      | TP-RST   | TP-RST                                                 |
| 39      | TP-VCC   | TP-VCC                                                 |
| 40      | GND      | Power Ground                                           |

-The System interface mode select.

| IM3 | IM2 | IM1 | IM0 | MPU Interface Mode |
|-----|-----|-----|-----|--------------------|
| 0   | 0   | 0   | 1   | RGB+8b SPI(fall)   |
| 0   | 0   | 1   | 0   | RGB+9b SPI(fall)   |
| 0   | 0   | 1   | 1   | RGB+16b SPI(rise)  |
| 0/1 | 1   | 0   | 1   | MIPI               |
| 0   | 1   | 1   | 0   | MIPI+16b SPI(rise) |
| 1   | 0   | 0   | 1   | RGB+8b SPI(rise)   |
| 1   | 0   | 1   | 0   | RGB+9b SPI(rise)   |
| 1   | 0   | 1   | 1   | RGB+16b SPI(fall)  |
| 1   | 1   | 1   | 0   | MIPI+16b SPI(fall) |

## 7. REFERENCE APPLICATION CIRCUIT

Please consult our technical department for detail information.

## 8. TIMINGS FOR RGB Interface

### 7.5.1 Serial Interface Characteristics (3-line serial):

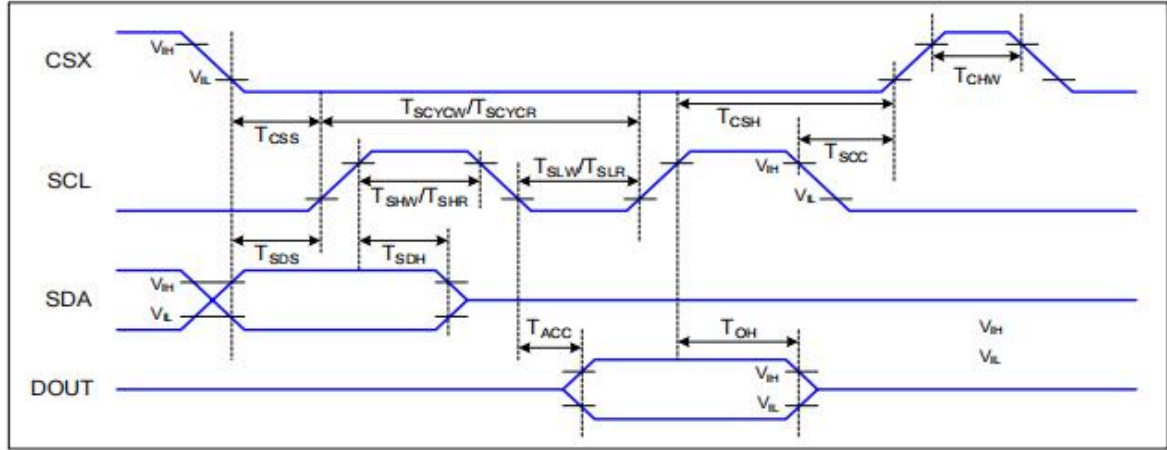


Figure 1 3-line serial Interface Timing Characteristics

VDDI=1.8, VDD=2.8, AGND=DGND=0V, Ta=25°C

| Signal       | Symbol      | Parameter                      | Min | Max | Unit | Description |
|--------------|-------------|--------------------------------|-----|-----|------|-------------|
| CSX          | $T_{CSS}$   | Chip select setup time (write) | 15  |     | ns   |             |
|              | $T_{CSh}$   | Chip select hold time (write)  | 15  |     | ns   |             |
|              | $T_{CSS}$   | Chip select setup time (read)  | 60  |     | ns   |             |
|              | $T_{Soc}$   | Chip select hold time (read)   | 60  |     | ns   |             |
|              | $T_{Chw}$   | Chip select "H" pulse width    | 40  |     | ns   |             |
| SCL          | $T_{Scycw}$ | Serial clock cycle (Write)     | 66  |     | ns   |             |
|              | $T_{Shw}$   | SCL "H" pulse width (Write)    | 15  |     | ns   |             |
|              | $T_{Slw}$   | SCL "L" pulse width (Write)    | 15  |     | ns   |             |
|              | $T_{Scycr}$ | Serial clock cycle (Read)      | 150 |     | ns   |             |
|              | $T_{Shr}$   | SCL "H" pulse width (Read)     | 60  |     | ns   |             |
|              | $T_{Slr}$   | SCL "L" pulse width (Read)     | 60  |     | ns   |             |
| SDA<br>(DIN) | $T_{Sds}$   | Data setup time                | 10  |     | ns   |             |
|              | $T_{Sdh}$   | Data hold time                 | 10  |     | ns   |             |

### 7.5.3 RGB Interface Characteristics :

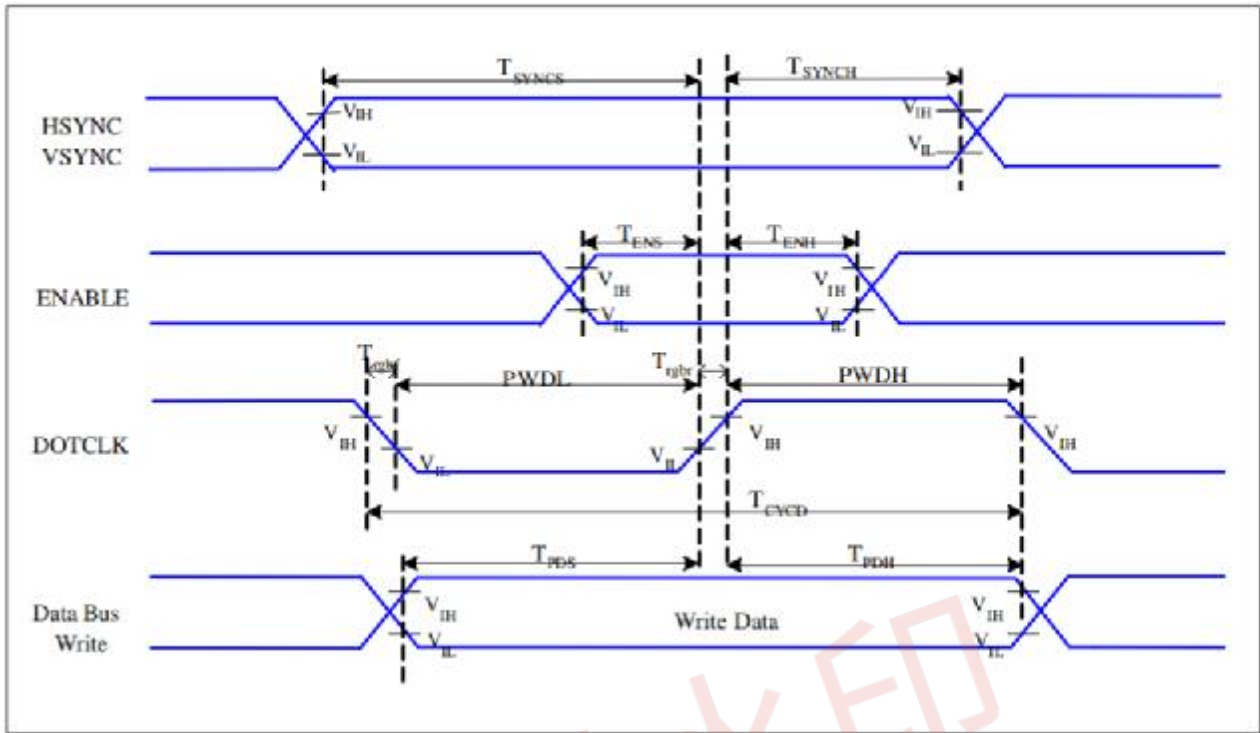


Figure 3 RGB Interface Timing Characteristics

$V_{DDI}=1.8, V_{DD}=2.8, AGND=DGND=0V, T_a=25^{\circ}C$

| Signal       | Symbol         | Parameter                     | MIN | MAX | Unit | Description |
|--------------|----------------|-------------------------------|-----|-----|------|-------------|
| HSYNC, VSYNC | $T_{SYNC}$     | VSYNC, HSYNC Setup Time       | 5   | -   | ns   |             |
| ENABLE       | $T_{ENS}$      | Enable Setup Time             | 5   | -   | ns   |             |
|              | $T_{ENH}$      | Enable Hold Time              | 5   | -   | ns   |             |
| DOTCLK       | $PWDH$         | DOTCLK High-level Pulse Width | 15  | -   | ns   |             |
|              | $PWDL$         | DOTCLK Low-level Pulse Width  | 15  | -   | ns   |             |
|              | $T_{CYCD}$     | DOTCLK Cycle Time             | 33  | -   | ns   |             |
|              | $Trghr, Trghf$ | DOTCLK Rise/Fall time         | -   | 15  | ns   |             |
| DB           | $T_{PDS}$      | PD Data Setup Time            | 5   | -   | ns   |             |
|              | $T_{PDH}$      | PD Data Hold Time             | 5   | -   | ns   |             |

Table 6 18/16 Bits RGB Interface Timing Characteristics

## 9.RELIABILITY TEST CONDITIONS

| No. | Test Item                          | Test Condition                       | Notes                                                                                                                                                                                                                                                                                                                    |
|-----|------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | High Temperature Storage           | +80°C / 240H                         | Inspection after 2~4h storage at room temperature, the sample shall be free from defects:<br>1. Air bubble in the LCD;<br>2. Seal leak;<br>3. Non-display;<br>4. Missing segments;<br>5. Glass crack;<br>6. The surface shall be free from damage.<br>7. The electrical characteristics requirements shall be satisfied. |
| 2   | Low Temperature Storage            | -30°C / 240H                         |                                                                                                                                                                                                                                                                                                                          |
| 3   | High Temperature Operating         | +70°C / 240H                         |                                                                                                                                                                                                                                                                                                                          |
| 4   | Low Temperature Operating          | -20°C / 240H                         |                                                                                                                                                                                                                                                                                                                          |
| 5   | Temperature Cycle                  | Ta=-10°C~+25~+50°C,10 Cycle,per30min |                                                                                                                                                                                                                                                                                                                          |
| 6   | High Temperature /Humidity storage | 60°C ,90%RH / 120H                   |                                                                                                                                                                                                                                                                                                                          |
| 7   | ESD test                           | Open Cell , Air mode , + 2 KV        |                                                                                                                                                                                                                                                                                                                          |




### Remarks:

- (1) The test samples should be applied to only one test item.
- (2) Sample size for each test item is 5~10pcs.
- (3) For High Temperature/Humidity storage test, pure water (resistance>10MΩ) should be used.
- (4) In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judge as a good part.
- (5) Failure judgment criterion: basic specification, electrical characteristic, mechanical characteristic, optical characteristic.

## 9. PACKING SPECIFICATION

TBD

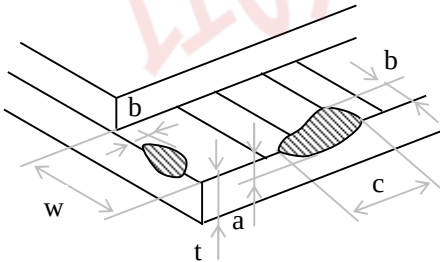
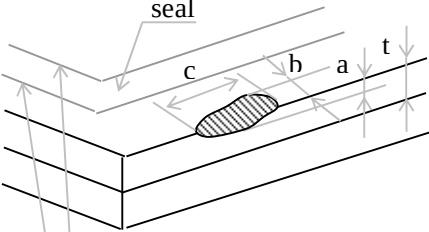
## 10. INSPECTION CRITERION

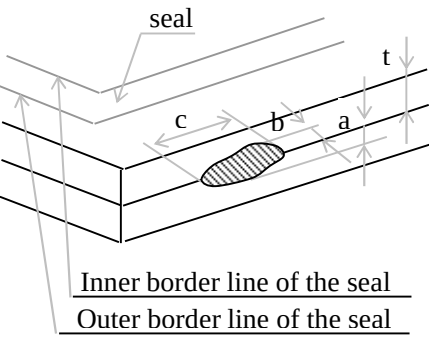
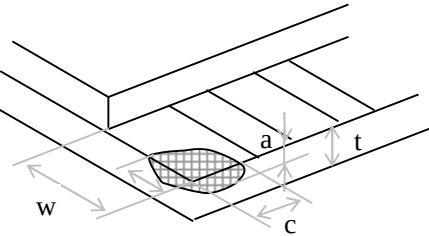
| Inspection item |                                                                                                                                                                            |                                                                                               | Judgement standard                                                                  |                                                             |                                                                                       |                   |            |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------|------------|
|                 |                                                                                                                                                                            |                                                                                               | Category                                                                            |                                                             | Acceptable number                                                                     |                   |            |
|                 |                                                                                                                                                                            |                                                                                               |                                                                                     |                                                             | A zone                                                                                | B zone            |            |
| 1               | Black spot, White spot, Bright Spot, Pinhole Foreign Particle, Bubble and Particle Between polarizer and glass, scratch on polarizer                                       |              | A<br>B<br>C                                                                         | $\Phi \leq 0.10$<br>$0.10 < \Phi \leq 0.20$<br>$\Phi > 0.2$ | Ignored<br>2<br>0                                                                     | Ignored           |            |
|                 |                                                                                                                                                                            | Total defective point(B,C)                                                                    |                                                                                     | 3                                                           |                                                                                       |                   |            |
|                 |                                                                                                                                                                            | Pixel point defect                                                                            | Bright spot                                                                         | $0.15 < \Phi \leq 0.20$                                     |                                                                                       |                   | $N \leq 2$ |
|                 | Dark spot/ Black spot                                                                                                                                                      |                                                                                               | $0.15 < \Phi \leq 0.20$                                                             |                                                             | $N \leq 2$                                                                            |                   |            |
|                 | Attached to the two pixels are bright spots                                                                                                                                |                                                                                               | $0.15 < \Phi \leq 0.20$                                                             |                                                             | $N \leq 2$                                                                            |                   |            |
|                 | Even a two pixel is dark                                                                                                                                                   |                                                                                               | $0.15 < \Phi \leq 0.20$                                                             |                                                             | $N \leq 2$                                                                            |                   |            |
|                 | Pixel total number                                                                                                                                                         |                                                                                               | $0.15 < \Phi \leq 0.20$                                                             |                                                             | $N \leq 2$                                                                            |                   |            |
|                 | Note1: the spot defect caused by foreign matter is judged according to the defect of the foreign body.<br>Note 2: when the light is not wired to show the type of defects. |                                                                                               |                                                                                     |                                                             |                                                                                       |                   |            |
|                 | 2                                                                                                                                                                          | Black line, White line, Bubble and Particle Between Polarizer and glass, Scratch on polarizer |  | A<br>B<br>C                                                 | $W \leq 0.03 \quad L \leq 3.0$<br>$0.03 < W \leq 0.05 \quad L \leq 3.0$<br>$0.05 < W$ | Ignored<br>2<br>0 | Ignored    |
|                 |                                                                                                                                                                            |                                                                                               | Total defective point(B,C)                                                          |                                                             | 2                                                                                     |                   |            |
|                 | 3                                                                                                                                                                          | Contrast variation                                                                            |  | A<br>B<br>C                                                 | $\Phi \leq 0.1$<br>$0.1 < \Phi \leq 0.3$<br>$\Phi > 0.3$                              | Ignored<br>2<br>0 | Ignored    |
|                 |                                                                                                                                                                            |                                                                                               | Total defective point(B,C)                                                          |                                                             | 2                                                                                     |                   |            |
| 4               | Bubble inside cell                                                                                                                                                         |                                                                                               | any size                                                                            |                                                             | none                                                                                  | none              |            |


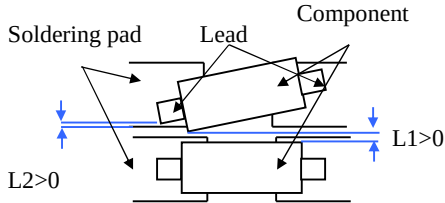
|   |                                            |                                                                                        |                             |                       |         |         |
|---|--------------------------------------------|----------------------------------------------------------------------------------------|-----------------------------|-----------------------|---------|---------|
| 5 | Polarizer defect<br>(if Polarizer is used) | Scratch and damage on polarizer, particle on polarizer or between polarizer and glass. | Refer to item 1 and item 2. |                       |         |         |
|   |                                            | Bubble, dent and convex                                                                | A                           | $\Phi \leq 0.3$       | Ignored | Ignored |
|   |                                            |                                                                                        | B                           | $0.3 < \Phi \leq 0.5$ | 2       |         |
|   |                                            |                                                                                        | C                           | $0.5 < \Phi$          | 0       |         |
|   |                                            |                                                                                        | Total defective point(B,C)  |                       | 2       |         |

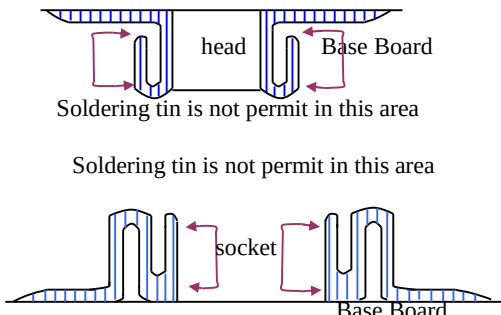
| Inspection item |               | Judgement standard                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------|---------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |               | Category                                                                                                          | Acceptable number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                 |               |                                                                                                                   | A zone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 6               | Surplus glass | ①Stage surplus glass<br>         | $b \leq 0.3\text{mm}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                 |               | ②Surrounding surplus glass<br> | Should not influence outline dimension and assembling.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 7               | MURA          | ①MURA                                                                                                             | Naked eye examination: red, green, blue screen does not allow the appearance, black screen requires visual is not obvious, the specific reference limit samples.<br>Note: the principle of closing the sample is to be installed on the whole machine and the end user will not find it in the normal usage scenario.<br>Inspection basis: 6%ND<br>(MURA mainly in the black screen and indoor light is relatively dark will be found, it is recommended to turn off the indoor lighting inspection.) |

|  |  |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--|--|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |  | <p>②Point Black / White / point(MURA)</p> <p>I</p> | <p>1, under the black / gray screen check:<br/> <math>D \leq 0.10\text{mm}</math> Ignored;<br/> <math>0.10\text{mm} &lt; D \leq 0.3\text{mm}</math>, <math>N \leq 2</math>;<br/> <math>D &gt; 0.3\text{mm}</math>: Unqualified.<br/>           2, switch to the red, green, blue in which any one of the screen appears black or white or point to point white or point of failure.</p>  |
|--|--|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

| Inspection item |                    | Judgment standard                                                                                                                                      |                                                                                   |
|-----------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                 |                    | Category(application: B zone)                                                                                                                          |                                                                                   |
| 8               | Glass defect crack | ①The front of lead terminals                                                                                                                           |                                                                                   |
|                 |                    |                                                                     |                                                                                   |
|                 |                    | A                                                                                                                                                      | If $a \leq t$ and $b \leq 1.0$ , $c$ is not limited                               |
|                 |                    | B                                                                                                                                                      | $a \leq t$ , $1 \leq b \leq 2\text{mm}$ , $c \leq 3\text{mm}$                     |
|                 |                    | C                                                                                                                                                      | If glass crack cover alignment mark, $b \leq 0.5\text{mm}$ .                      |
|                 |                    | D                                                                                                                                                      | Crack at two sides of lead terminals should not cover patterns and alignment mark |
|                 |                    | ②Surrounding crack—non-contact side                                                                                                                    |                                                                                   |
|                 |                    |                                                                     |                                                                                   |
|                 |                    | <p><u>Inner border line of the seal</u></p> <p><u>Outer border line of the seal</u></p> <p><math>b &lt; \text{Inner borderline of the seal}</math></p> |                                                                                   |

|  |  |                                                                                                                                                                                                   |                                                                                                                      |  |
|--|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|--|
|  |  | <p>③ Surrounding crack— contact side</p>  <p>Inner border line of the seal<br/>Outer border line of the seal</p> | <p><math>b &lt; \text{Outer border line of the seal}</math></p>                                                      |  |
|  |  | <p>④ Corner</p>                                                                                                 | <p>A</p> <p><math>a \leq t, b \leq 3.0, c \leq 3.0</math></p> <p>*Glass crack should not cover patterns used for</p> |  |

| Inspection item |            |                                                                                                                                                                                                                                                                                                                             | Judgement standard                                                                                                                                                                                 |
|-----------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9               | FPC defect | <p>Component soldering: No cold soldering, short/open circuit, burr, tin ball.</p> <p>The flat encapsulation component position deviation must be less than 1/2 width of the pin (Pic.1);</p> <p>The sheet component deviation: pin deviates from the pad and contact with the near components is not permitted (Pic.2)</p> |  <p>Component</p> <p><math>L \leq W/2</math></p> <p><math>W</math></p>                                         |
|                 |            | <p>lead defect:</p> <p>The lead lack must be less than 1/2 of its width;</p> <p>The lead burr must be less than 1/2 of the seam;</p> <p>Impurities connect with the near leads is not permitted</p>                                                                                                                         |  <p>Soldering pad</p> <p>Lead</p> <p>Component</p> <p><math>L1 &gt; 0</math></p> <p><math>L2 &gt; 0</math></p> |

|  |  |                                                                                                                                                                                                                     |                                                                                    |
|--|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  | <p>Connector soldering:<br/>Soldering tin is at contact position of the plug and socket is not permitted<br/>No foundation is scald<br/>Serious cave distortion on plug and socket contact pin is not permitted</p> |  |
|--|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|

## 11. GENERAL PRECAUTIONS

### 1.1 HANDING

- (1) When the module is assembled, it should be attached to the system firmly. Be careful not to twist and bent the module.
- (2) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (3) Note that display modules are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (4) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, straining and discoloration may occur.
- (5) If the display module surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, should be wiped by moisten cloth with isopropyl alcohol or ethyl alcohol solvents, DO NOT with water, ketone type materials (e.g. acetone), aromatic, toluene, ethyl acid or methyl chloride, and so on.
- (6) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (7) Use finger-stalls with sort gloves in order to keep display clean during the incoming inspection and assembly process.

- (8) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (9) Do not touch directly conductive parts such as the CMOS LSI pad and the interface terminals with bare hands, therefore operations should be grounded whenever he/she comes into contact with the modules.
- (10) Do not exceed the absolute maximum rating value. (The supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on), otherwise the module may be damaged.

## **1.2 SOLDERING**

- (1) Use soldering irons with proper grounding and no leakage.
- (2) For No RoHS Product: soldering temperature is 290~350°C, soldering time is 3~5s; for RoHS Product: soldering temperature is 340~370°C, soldering time is 3~5s.
- (3) If soldering flux is used, be sure to remove any remaining flux after soldering (This does not apply in the case of a non-halogen type of flux).

## **1.3 STORAGE**

- (1) DO NOT leave the module in high temperature and high humidity for a long times, keep the temperature from 0°C to 35°C and relative humidity of less than 60%.
- (2) It is highly recommended to store the module in a dark place. The Liquid crystal is deteriorated by ultraviolet, DO NOT leave it in direct sunlight and strong ultraviolet ray for many hours.