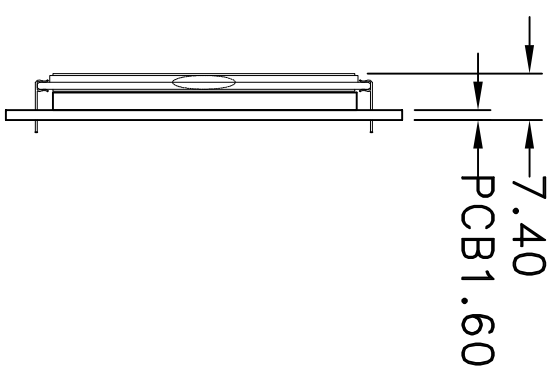
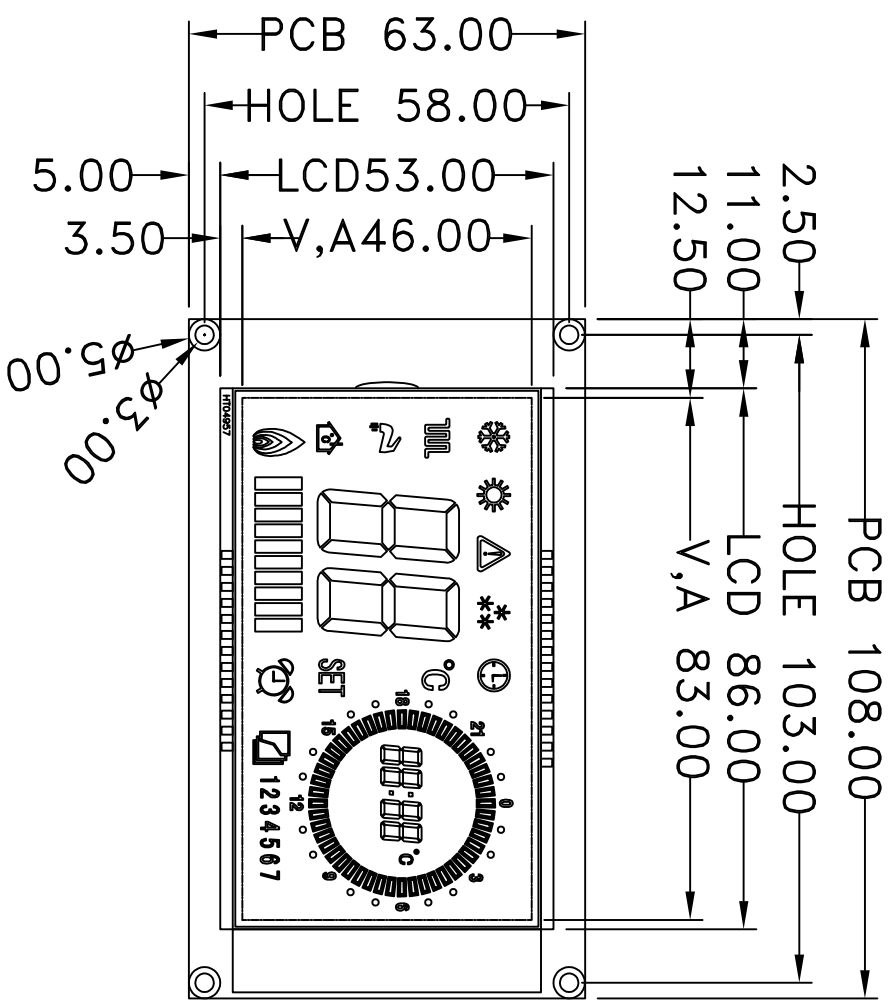


*1. LCD Display Type	HTN,Transmissive,Negative		
*2. Viewing Direction	12H	*6. Storage Temp	-20°C~80°C
*3. LCD Driver Mode	1/6Duty,1/3Bias	*7. Driver IC	VKS232A
*4. Operating Voltage	5.0V	*8. Backlight	4PCS WHITE LEDS VF=3.0V IF=80mA
*5. Operating Temp	-10°C~70°C		

HOT DISPLAY					
Dwg Title		HTM4957			
EDIC No		Unit		Veri	
Scale		Tol.		A/0	
1:1		±0.3			
Drawn		Checked		Date	
				2026-09-01	