
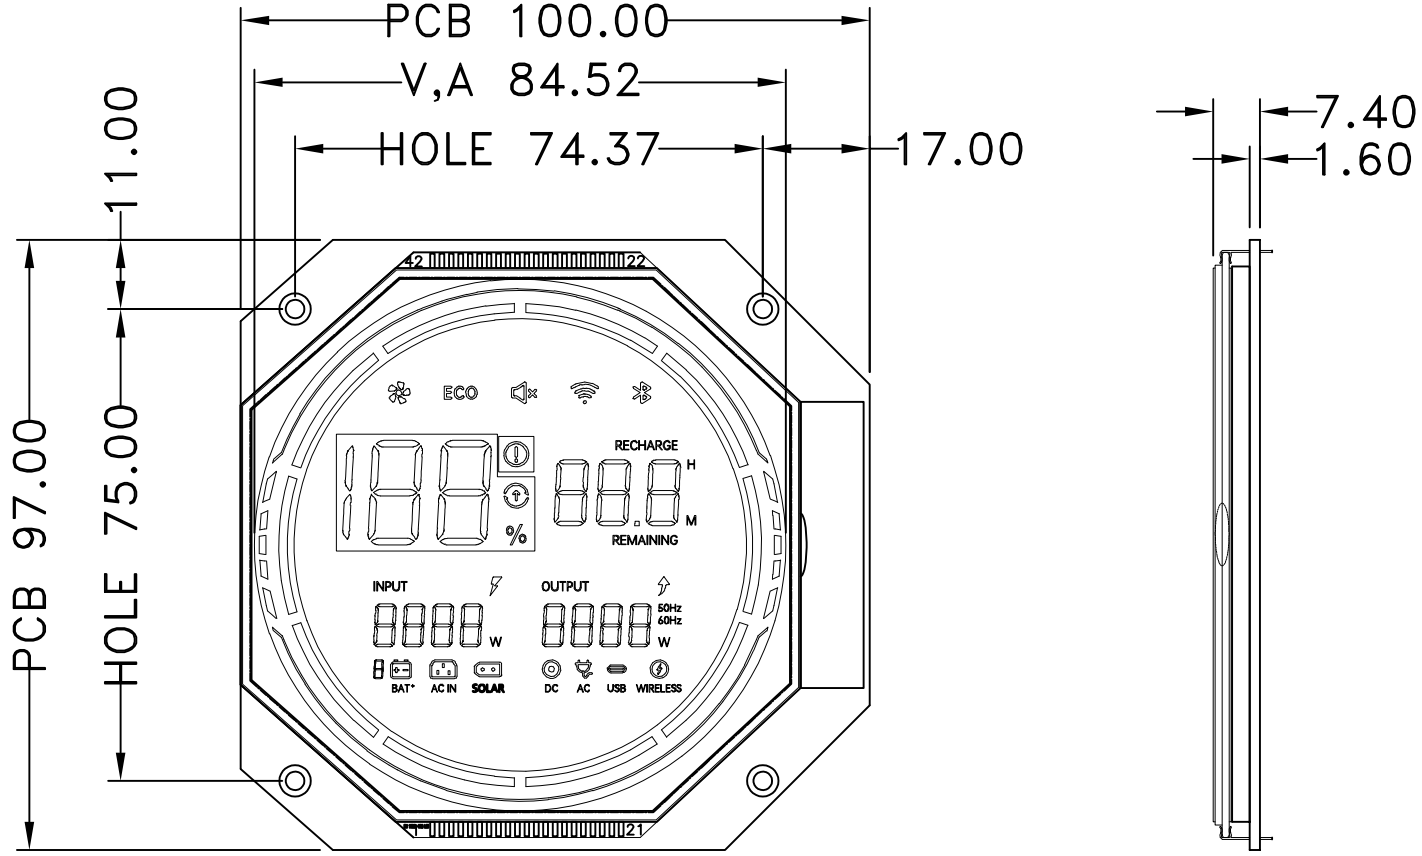


*1. LCD Display Type	VA,Transmissive,Negative		
*2. Viewing Diretion	12H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/4Duty,1/3Bias	*7. Driver IC	VKS232A
*4. Operating Voltage	5.0V	*8. Backlight	4PCS WHITE LEDS VF=5.0V If=80mA
*5. Operating Temp	-20°C~70°C	*9. ROHS	



Backlight Circuit
Scale=free

HOT DISPLAY

Dwg Title:	HTM6746		
EDC No:		Ver:	A/0
Scale: 1:1	Unit: mm	Tol.: ±0.3	
Drawn	Checked	Date:	2026-09-01