





Terminal No./Pin Name	Terminal Name
1	/CS1
2	/RES
3	A0
4	WR
5	RD
6	DO
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	C3+
18	C1-
19	C1+
20	C2+
21	C2-
22	V4
23	V3
24	V2
25	V1
26	V0
27	C86
28	PS

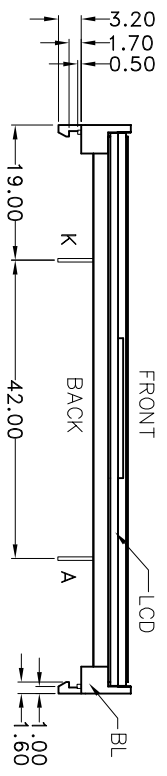

*1. LCD Display Type	STN-YG, Transflective, Positive	*6. Storage Temp	-40°C~85°C
*2. Viewing Direction	6H	*7. Driver IC	ST7565P
*3. LCD Driver Mode	1/64Duty, 1/9Bias	*8. Backlight	YELLOW GREEN Vf=5.0v If=60mA
*4. Operating Voltage	3.3V	*9. ROHS	
*5. Operating Temp	-30°C~80°C		

# HOT DISPLAY

Dwg Title:	HTG12864-125-05Y-28C05-V02		
EDC No:			
Scale	1:1	Unit	mm
Scale		Tol.	±0.3
Drawn	Checked	Date:	2025-03-11
		Ver:	A/0