

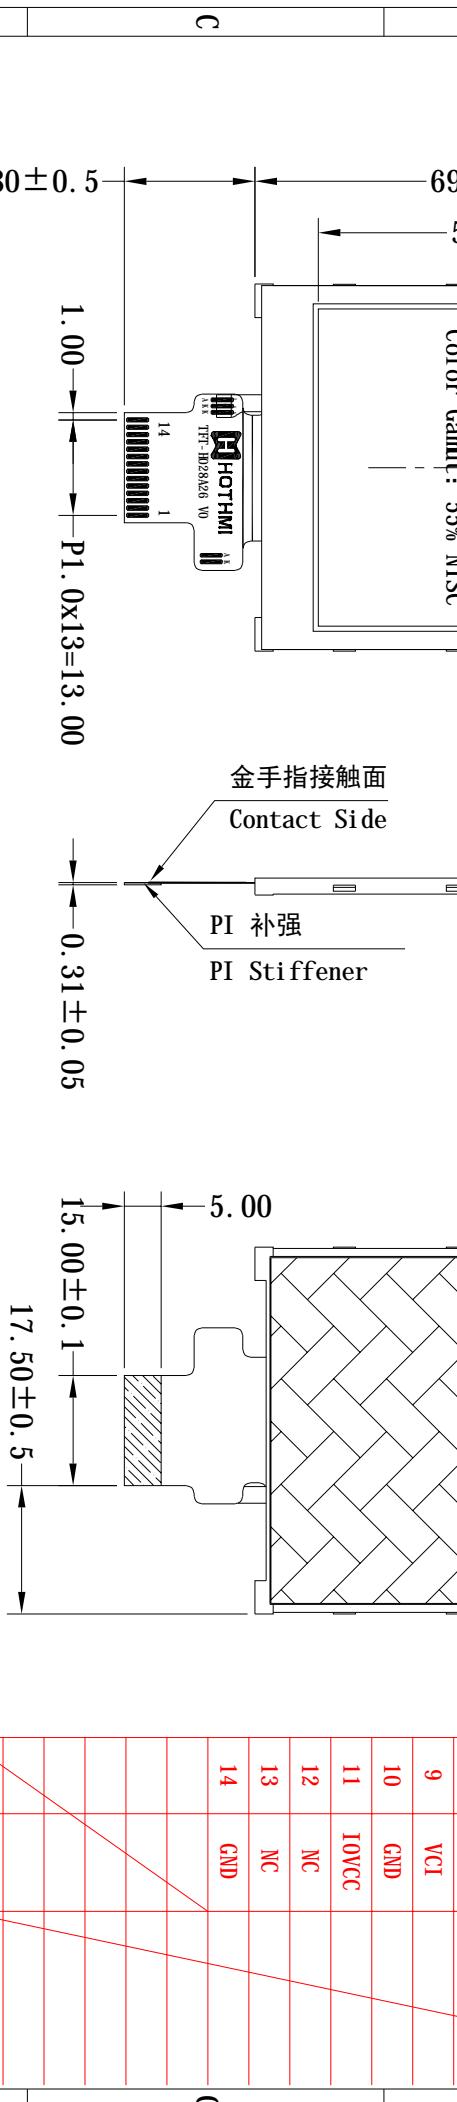
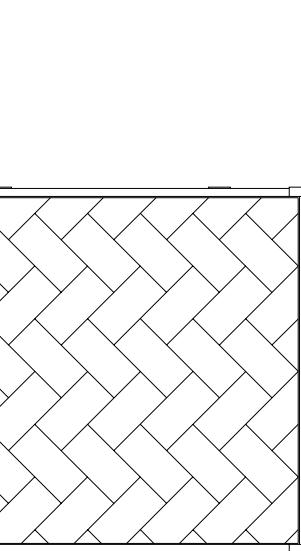


****为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于2分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

A	B	C	D
---	---	---	---

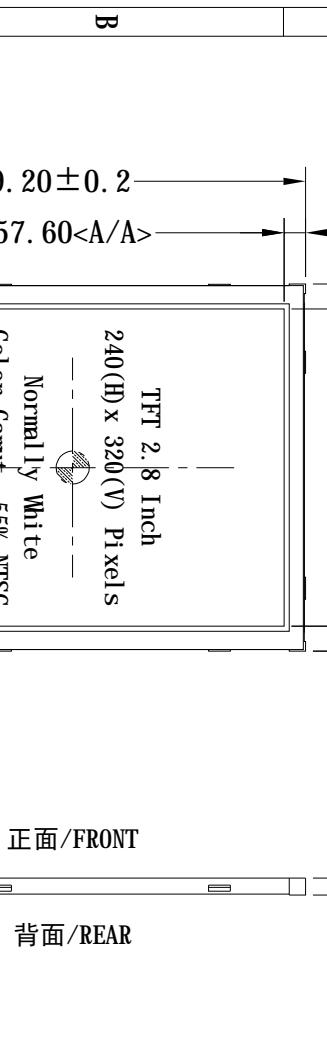

定义完全兼容H028A8

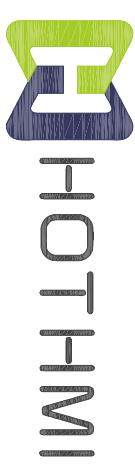

D

TFT 观看角度 TFT Viewing Di retion	U50/D20/R45/L45 (Typ.)	TFT 工作温度 TFT Operating Temp	-20 °C ~ +70 °C
模块接口 Module Interface	4-Line SPI	TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C
模块工作电压 Module operating Voltage	V _{DD} = 3.0 ± 0.3V	背光驱动条件 Backlight conditions	V _f = 3.0 ± 0.3V, I _f = 80 mA
模块驱动芯片 Module Driver IC	ST7789< TFT >	液晶模块亮度 LCD Brightness	300 ± 50 cd/m ² /恒流测试

图纸字体：黑体
Drawing Font: Bold

	Pin_SIGNAL	Pin_SIGNAL
1	LEDA	
2	LEDK	
3	GND	
4	GSB	
5	RESX	
6	D/CX	
7	SCL	
8	SDA	
9	VCI	
10	GND	
11	10VCC	
12	NC	
13	NC	
14	GND	

A B C D