


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel.If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

字体：黑体
 bold (typeface)

TFT Pin_SIGNAL

1	NC		
2	LEDK		
3	NC		
4	LEDA		
5	NC		
6	VCI		
7	IOVCC		
8	NC		
9	RESX		
10	GND		
11	NC		
12	NC		
13	GND		
14	DCP		
15	DCN		
16	GND		
17	DOP		
18	DON		
19	GND		
20	GND		

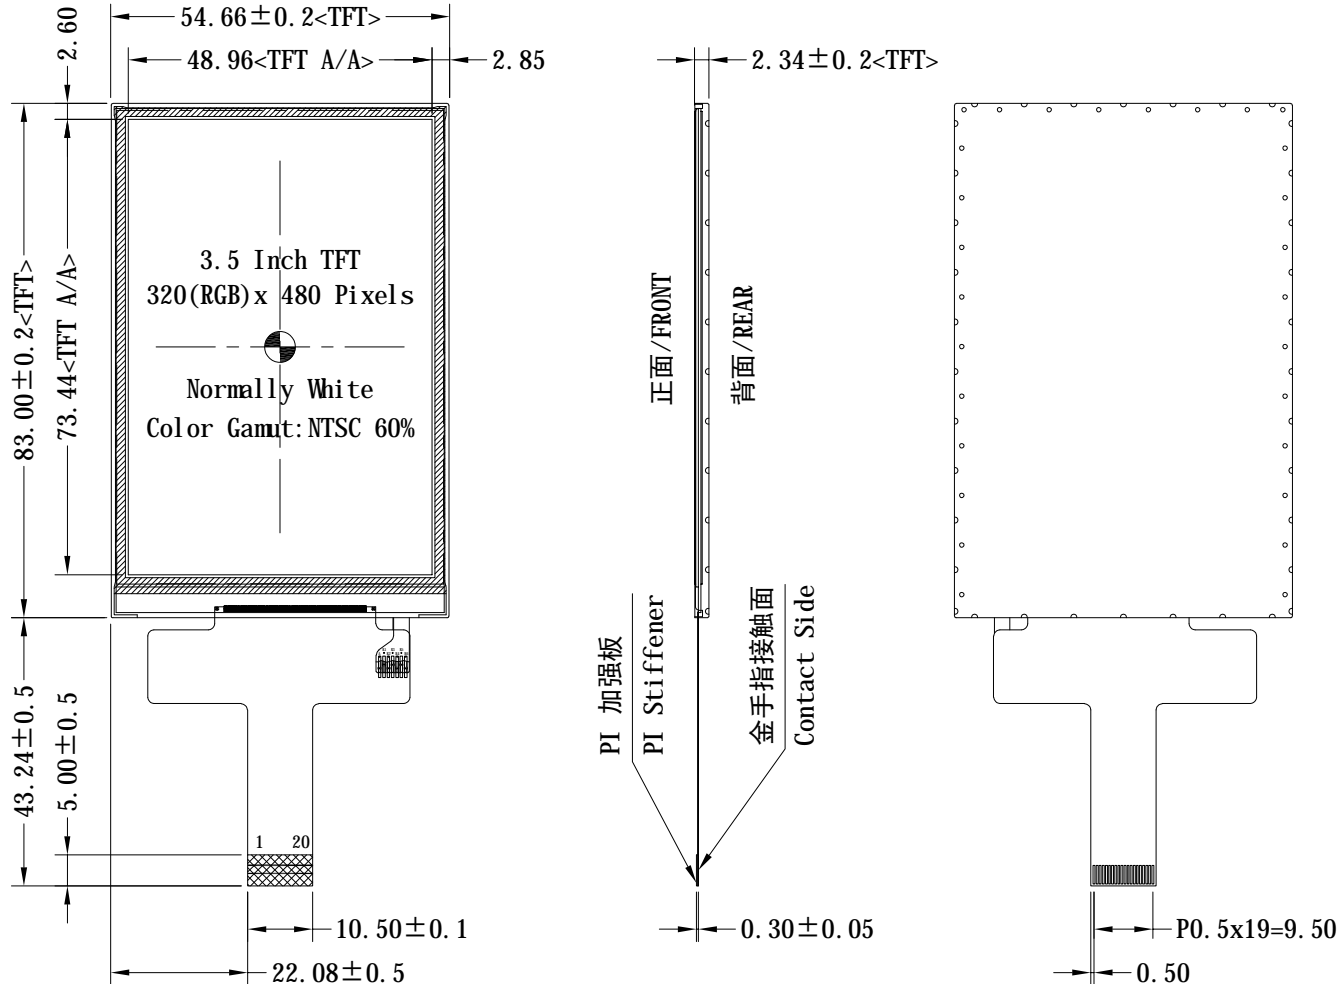

观看方向/角度 Viewing Direction	U60/D60/R70/L70	TFT 储存温度 TFT Storage Temp	-30 °C ~ 80 °C
接口 Interface	MPI DSI 1 Lane	驱动芯片 Driver IC	ST7365P<TFT>或兼容芯片
工作电压 Operating Voltage	VCI=3.0 ~ 3.3V, IOVCC=1.8 ~ 3.3V	背光驱动条件 Backlight conditions	Vf= 3.0 ~ 3.4V, If= 120 mA
TFT 工作温度 TFT Operating Temp	-20 °C ~ 70 °C	液晶模组亮度 LCM Brightness	500 cd/m ² (Typ)/固定电流测试

HOTHMI

产品型号
Product model **TFT-H035A27HVTST5N20**

比例 Scale	1:1	设计制图 Design	Li u. YL	日期 Date	2024-06-06
版本 Ver	V0-0	单位 Unit	MM	公差 Tol.	±0.3